

The SenSource Series 6300 Displays are a 2, 3, 4 or 6-digit intelligent LED display that includes a wireless remote control for operation and programming. The display also includes 2 push buttons and 40 feet of cable for operating start, stop and count functions. Additional displays can be wired together to synchronize the numbers. In timer mode this display is capable of counting up/down days, hours, minutes, seconds, and 100th seconds, or it can be changed to a clock mode to display the time of day. In counter mode unit can also be used to count up/down events or input pulses. Counter mode is commonly used for manufacturing and production piece counting. An internal chime can be programmed to sound when the programmed time is reached or when the counter counts down to zero. The 6300 series displays also include an internal battery backup to save timer, clock or count values if power is lost.



Remote Control (included with each display)

Can be used in conjunction with or instead of the wired push buttons to start or stop, advance and decrement the display. Or set the programming options.



Stand-Alone Clock

SenSource carries two Stand-Alone Time-of-Day Clocks: a 4- and a 6-Digit Clock. Each clock can be set with two buttons. One button sets the minutes and the other button sets the hours. The seconds are reset to zero each time either button is pushed. On the 4-Digit Display, only hours and minutes are visible. On the 6-Digit Display hours, minutes, and seconds are visible.

Stand-Alone Count-down or Count-up Timer

The 6300 Series Display can be purchased in 2-, 3-, 4-, or 6-digit models. The displays can be set by the user to any time and begin counting up or down with the press of an external button or the hand held remote. The 6300 series displays have been designed with flexibility in mind. Some of the user adjustable settings include Input button logic, Start and Stop time, Count down/up, auxiliary output time, and colon flash rate among others.

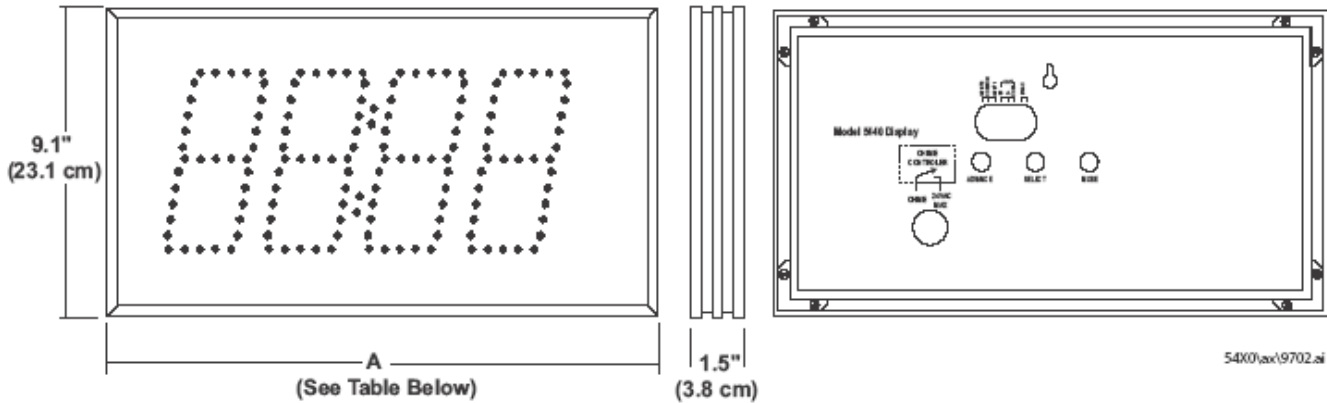
Count-Up Counter

The 6300 Series Display can be used as a simple counter that will increment or decrement the number on the display with a push of a momentary button or hand held remote. One button will increment the display (counting up) while the other will decrement the display (counting down). The counter can function in a variety of applications including production counters, part counters, event counters, now-serving sign and take-a-number systems.

Networking Signs – Multiple Signs can be connected together so all will display the same number in a “Master-Slave” configuration.




Available Models (hand held remote control is available for all versions)

DIGITS	MODEL NUMBER	Remote Control (Optional)
2-Digit Display	Model SC-6320	SC-A5400-3100
3-Digit Display	Model SC-6330	SC-A5400-3100
4-Digit Display	Model SC-6340	SC-A5400-3100
6-Digit Display	Model SC-6360	SC-A5400-3100



Voltage Input Requirements	24 volts AC or DC			
Character Height	5.5 Inches			
Character Viewing Distance	125 Feet			
Temp	-20°C to 70°C			
Case	Aluminum Extrusion			
Color	Black Frame w/ Dark Red Plexiglas Faceplate			
Environment	Indoor Use (See Factory for Outdoor Cases)			
Display Size	2 Digit	3 Digit	4 Digit	6 Digit
Power Requirements	2.9 Watts	3.5 Watts	4.6 Watts	6.8 Watts
Weight	2.5 lbs	3.0 lbs	3.5 lbs	5.25 lbs
Width "A" Dimension Inches	8.8"	13.2"	16.8"	24"
Width "A" Dimension Centimeters	24.9 cm	33.5cm	42.7cm	61.4cm

Displays Include

 <p>One Wireless Remote Control</p>	 <p>One 24vac power adapter with 20 feet of wire</p>	 <p>Two Brass Push Buttons with 40 feet of wire</p>
--	---	---